



WIRELESS HOUR METER
USER MANUAL




A. INSTRUCTIONS FOR PROPER USE

Before using the ProTaper Wireless Hour Meter, please read all instructions and warnings carefully. Failure to do so may lead to incorrect operation or device malfunctions, resulting in damage to the product or personal injury.

- 1.** This product is not a toy. Keep it out of reach of children and animals, as it contains small parts that could be swallowed. Do not use the product for purposes other than those specified in these guidelines.
- 2.** Before use, always make sure that the ProTaper Wireless Hour Meter is properly installed and operational.
- 3.** Apply the ProTaper Wireless Hour Meter to the motorcycle where suggested, ensuring that it is in a protected position so as to avoid damage in the event of falls or bumps. We strongly suggest that contact between the device and the motorcycle is improved through the use of cable ties. These can be inserted into the slots on the outer case.
- 4.** Do not expose the device to temperatures exceeding 70°C / 158°F.
- 5.** Using the ProTaper Wireless Hour Meter while riding can be distracting and dangerous. Do not check the display while riding or in situations where distraction could endanger your safety and that of others.
- 6.** Do not use a high-pressure washer.

B. PRODUCT LAYOUT

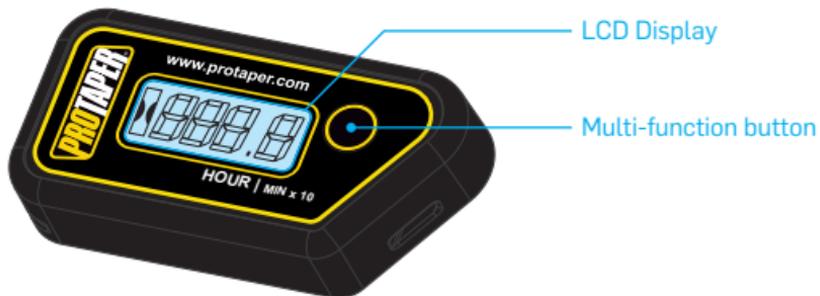

Main Features

- Exclusive vibration sensitive system to detect engine working hours
- Adjustable sensitivity
- Total hour counter (not resettable) up to 1,000 hours*
- Partial hour counter (resettable) up to 1,000 hours*
- Button to view total and partial hour counters and to reset partial hour counter
- Lock Mode stops counter (can be turned on/off)
- Internal battery (6-year lifetime)**
- IP66+IP67 dust and water resistant

*Once past 999 hours and 59 minutes, the display will show 000.0

**Average based on typical motocross use

C. INSTALLATION AND USE

Press the multi-function button. The display will show “Loc,” indicating that Lock Mode is active. Press the button once more to turn Lock Mode off.

1. Test if the device works properly before installing it permanently on the bike. Turn on the engine and place the device where it will be fitted (we suggest the outer part of the frame), pressing two fingers firmly on the sides of the device with the engine idling.



The device will turn on automatically after about 8 seconds. The hourglass icon on the left side of the display will start blinking. This means that the device has started to count. **WARNING:** all digits will blink if the device detects an anomaly. Please contact your dealer if this happens.


2. Clean the application surface carefully before installing the device. A low-residue solvent like acetone is recommended.



3. Recommended Positions



Frame (keep away from spots hotter than 70°C)

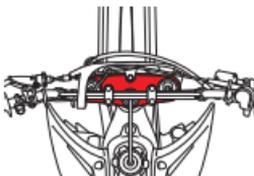

Upper Triple Clamp



Under Seat / Subframe
(in a protected position)

C. INSTALLATION AND USE (Continued)

4. Remove the protective backing from the adhesive on the back of the device. Install it at a temperature greater than 10°C / 50°F.

WARNING: We recommend securing the device with cable ties, which can be inserted into the slots on the outer case. Keep the device away from places where the temperature exceeds 70°C / 158°F (e.g. the exhaust pipe).

5. Start the engine. The device will automatically start after about 8 seconds. The hourglass icon on the left side of the display will blink when the device has started counting.



Hourglass Icon
↑
Decimal point, separating hours and tens of minutes

6. With the engine turned off, using the multi-function button allows the following actions:

View Total Counter

Press the multi-function button once. The display will show "tot" for about 3 seconds. Afterward, it will display the total counter for about 8 seconds.

View Partial Counter

While viewing the total counter, press the multi-function button once more. The display will show "Par" for about 3 seconds. Afterward, it will show the partial counter for about 8 seconds.

Reset Partial Counter

While viewing the partial counter, press and hold the multi-function button until the display shows 4 blinking dashes, then release. After a few seconds, the display will turn off. The partial counter will then be reset.

Activate Lock Mode

Press the multi-function button once. When the display shows "tot," press and hold the multi-function button for about 8 seconds. The display will show "Loc" and counting will be stopped. To turn Lock Mode off and resume counting, simply press the multi-function button once more.

Adjust Sensitivity

Press the multi-function button 3 times. The display will show "Sen," followed by the current sensitivity level. This will be either "Hi" (high sensitivity) or "Lo" (low sensitivity). To switch between the two levels, press the multi-function button. After a few seconds, the display will turn off and the selected sensitivity level will be active.



ProTaper • Irvine, California • 951-736-5369

www.protaper.com • [@protaper](https://twitter.com/protaper)